




## SERIES C12 FLAT TOP

Bidirectional, with a 12 mm pitch, it is ideal for small product transfers at high speed.

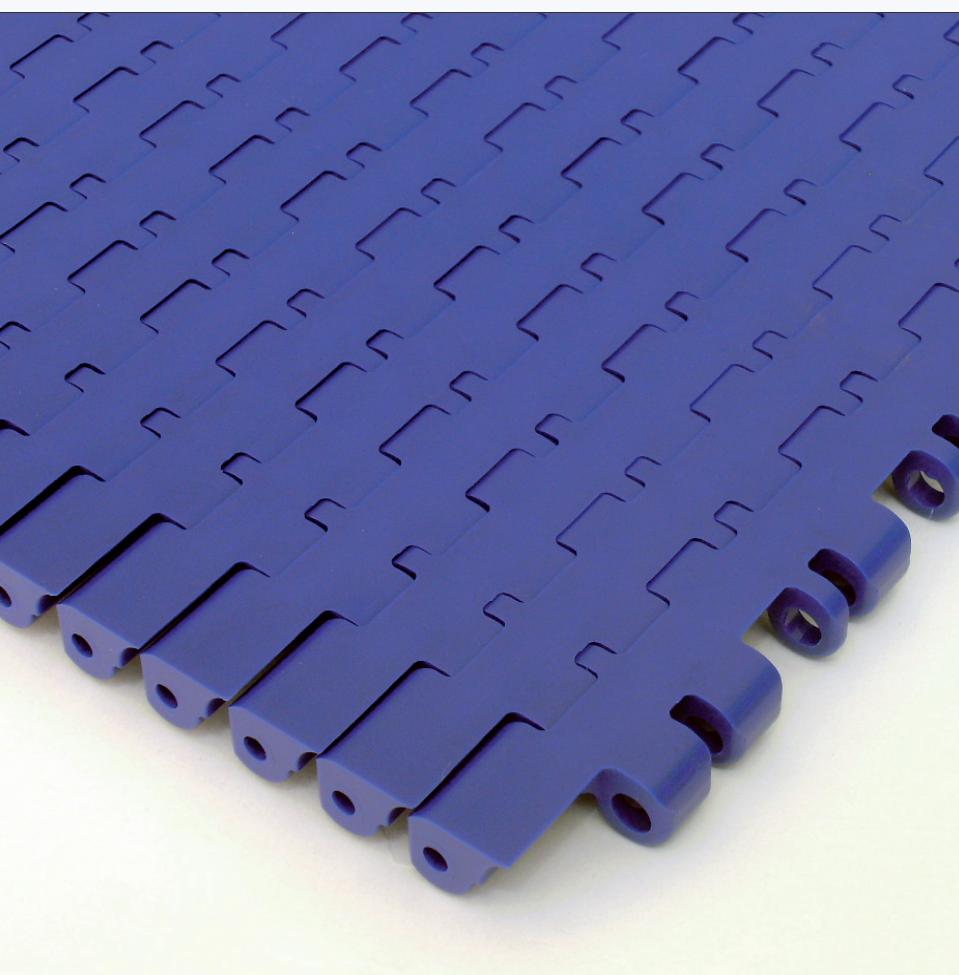

Its small pitch, as well as the specific drive sprocket designed for it, enables this belt to be used at very high speeds.

It is manufactured in polypropylene, polyethylene and polyacetal observing the International Regulations to be used in food processes.

**SERIES**

**C12**

**FLAT TOP**



**high speed conveying**

**very small  
product transfer**

**metal detectors**

**container handling**


**AFHER EUROBELT S.A.**

Topacio, 41  
47012 Valladolid  
Spain


Phone: +34 983 217 480  
Fax: +34 983 217 481  
email: afher@eurobelt.com  
web: www.eurobelt.com

# SERIES C12 FLAT TOP

## BELT DATA

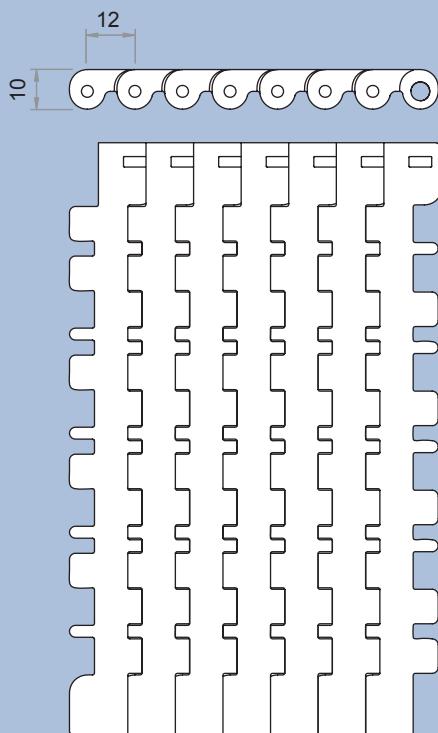


Minimum dimensions of transfer

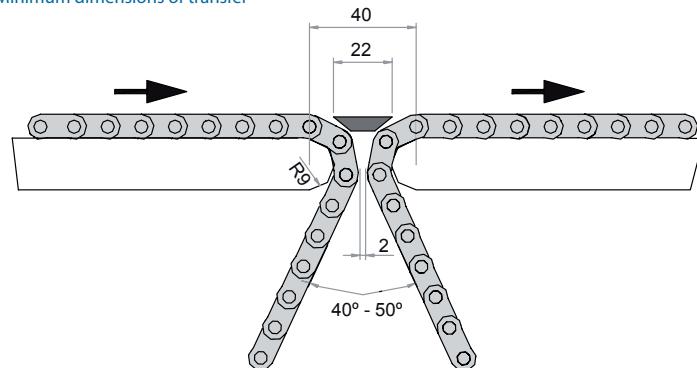

Pitch 12 mm	Material of the belt	Material of the rod	Belt strength (kg/m)	Temperature range (°C)	Belt weight (kg/m <sup>2</sup> )	Available colours in stock
Open area 0 %	Polypropylene	Polypropylene	530	+1 to +104	6.07	White - Grey - Blue
	Polyethylene	Polyethylene	300	-50 to +65	6.38	Natural - Blue
Belt width Increments of 25 mm	Polyacetal	Polypropylene	1,450	+1 to +90	8.61	Blue
	Polyacetal	Polyethylene	1,050	-40 to +65	8.65	Blue

## ACCESSORIES [SPROCKETS]



Nº of teeth T	Ø Pitch	Bore for square shaft (mm)	Bore for square shaftb (inch)	Hub width
11	42.59	20	3/4"	
20	76.7	40	1.5"	
26	99.55	40	1.5"	
31	118.61	40 - 60	1.5" - 2.5"	
40	152.94	40 - 60	1.5" - 2.5"	25

**★EUROBELT★**

### AFHER EUROBELT S.A.

Topacio, 41 47012 - Valladolid (Spain)  
Phone: +34 983 217 480 Fax: +34 983 217 481  
e-mail: afher@eurobelt.com  
web: www.eurobelt.com

### DISTRIBUTOR:

