

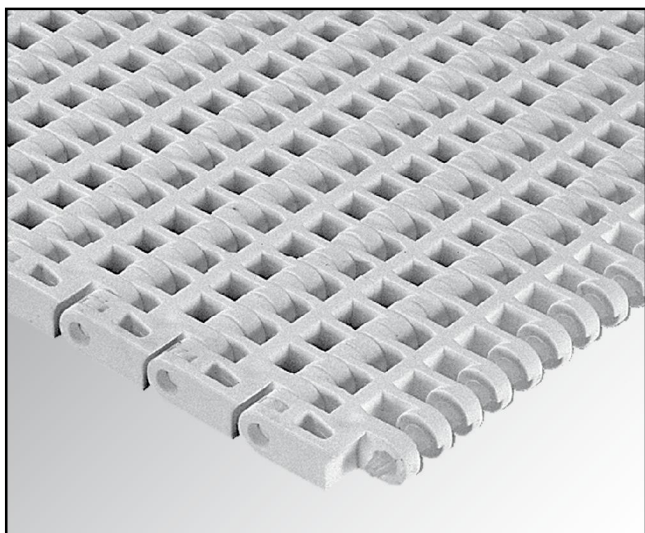


SERIES E20 FLUSH GRID

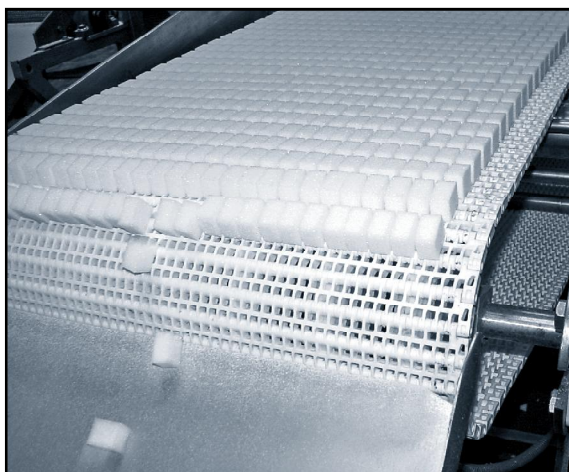

Eurobelt Series E20 Flush Grid conveyor belt is ideal for applications in which drainage through the belt is required, avoiding any accumulation of particles on its surface. Easy cleaning due to the possibility of applying water under pressure through the belt.


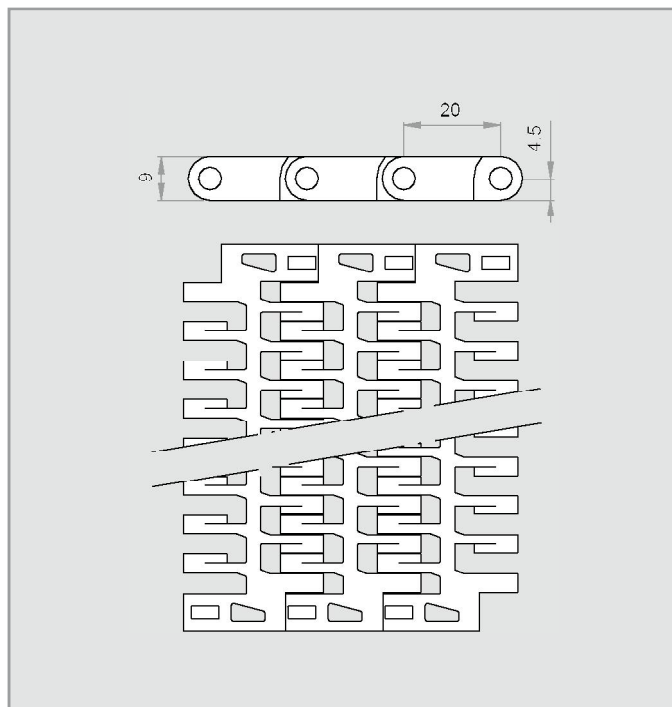


| | |
|---------------------------|-------------------|
| Pitch | 20 mm |
| Surface | Flush Grid |
| Open area | 32 % |
| Maximum opening (approx.) | [4 x 6] mm |
| Thickness | 9 mm |
| Drive system | Central |
| Belt width | Multiples of 8 mm |
| Rod diameter | Ø 4.6 mm |
| Retention system | Cap |

| Material of the belt | Material of the rod | Belt strength (kg/m) | Temperature range (°C) | Belt weight (kg/m ²) | Available colours in stock |
|----------------------|---------------------|----------------------|------------------------|----------------------------------|----------------------------|
| PP - Polypropylene | PP - Polypropylene | 1,000 | +1 to +104 | 4.20 | [W] - [G] - [B] |
| PE - Polyethylene | PE - Polyethylene | 500 | -50 to +65 | 4.57 | [N] - [B] |
| AC - Polyacetal | PP - Polypropylene | 2,150 | +1 to +90 | 6.32 | [B] |
| | PE - Polyethylene | 1,800 | -40 to +65 | 6.36 | [B] |




Colours: [W] White - [G] Grey - [B] Blue - [N] Natural - [O] Black. // The materials and colours that are normally in stock are those above indicated. In special cases in which it is needed a belt in a material or colour different from those above mentioned, you should ask directly to EUROBELT.

ACCESSORIES [SPROCKETS]

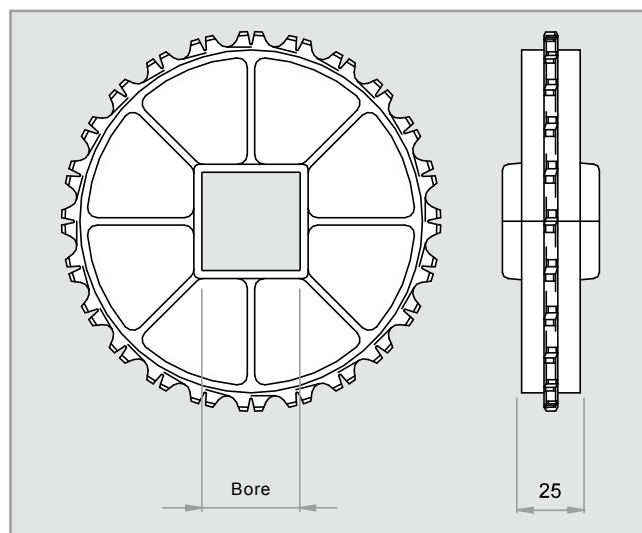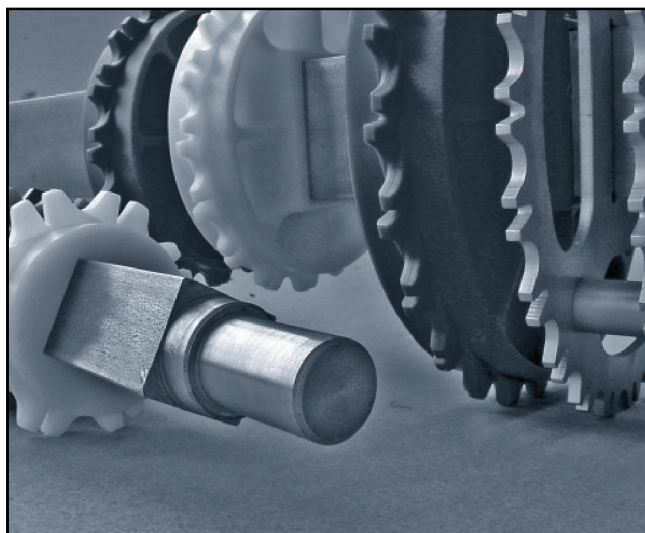

| N° of teeth T | Pitch diameter | Bore for square shaft | | Hub width | Materials |
|------------------|-------------------|-----------------------|------|--------------|--|
| | | mm | inch | | |
| 8 | 52.5 | 20 | 3/4" | 24 | Polypropylene Polyacetal Stainless steel |
| 16 | 102.5 | 40 | 1.5" | 40 | |
| 24 | 153.5 | 40 60 | 1.5" | 40 | |

SPROCKETS FOR SQUARE SHAFT

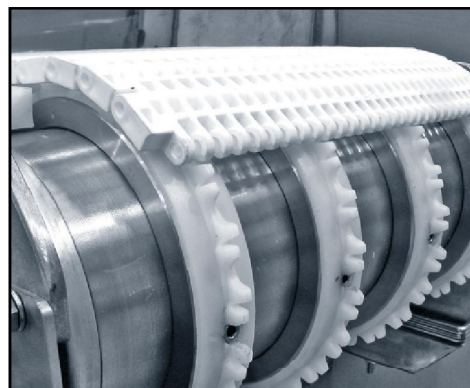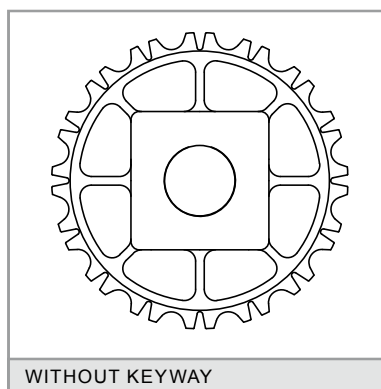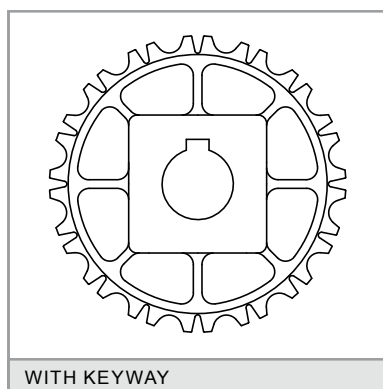

We have plastic sprockets for round shaft with and without keyway. We also have sprockets to be used with motor drum in applications needing a special cleaning or in conveyors in which it is not possible to place the motor in the outside due to problems of space or safety.

ACCESSORIES [RETAINING RINGS]

INSTALLATION


These rings are placed at every side of the central sprocket to fasten it to the shaft in order to avoid any lateral movements of the belt.

They are manufactured in AISI 316 stainless steel and they are fixed by means of a set screw stuffed in the ring itself.


One sprocket, duly fixed with 2 retaining rings, should be put in the centre. Then you should place the same quantity of sprockets at every side of the central one but without any fixing, as they will absorb the possible belt expansions and contractions.

The same procedure should be carried out in both shafts.

| Bore for square shaft | Screws |
|-----------------------|---------|
| 20 | M 5 x 5 |
| 40 | M 6 x 6 |
| 60 | M 6 x 6 |

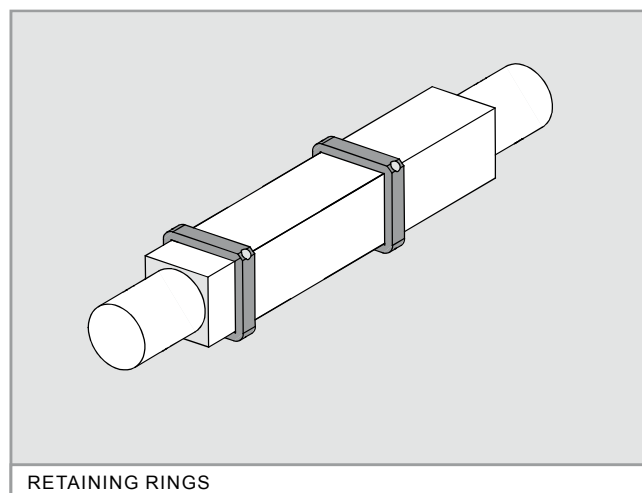

RETAINING RINGS

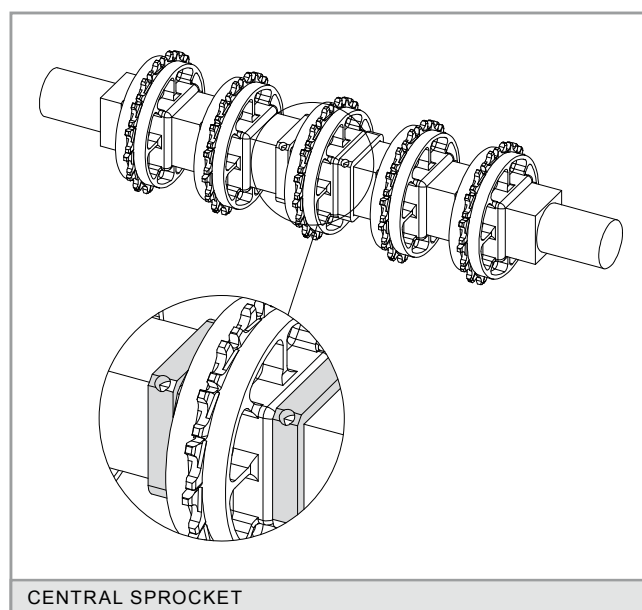

CENTRAL SPROCKET

ACCESSORIES [FLIGHTS AND SIDE GUARDS]




The **flights** are plastic accessories to be inserted across the belt. They are used to push the product in ascent, descent or accompaniment applications, avoiding that it slips along the belt.

Its non-stick side has ribs that project over the surface to prevent the product from sticking.

The **side guards** are plastic accessories to be inserted into the belt structure to retain the product laterally, avoiding overflows and frictions with the conveyor structure itself.


It is possible to cut down the standard height for special applications.

STRAIGHT FLIGHTS [STREAMLINE + NO CLING]

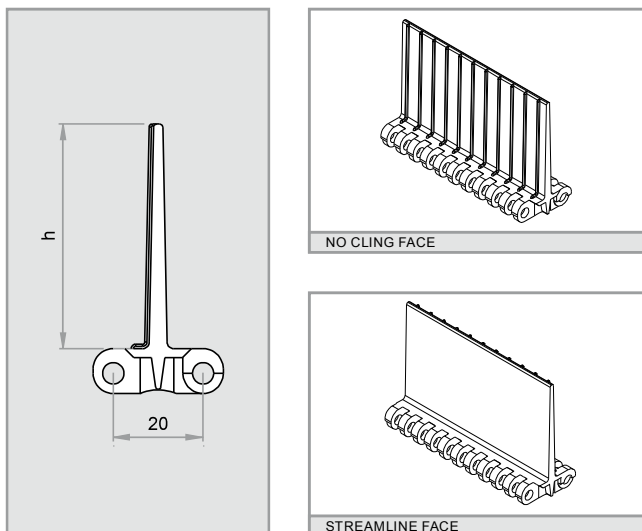

| Accessories | Height (h) | Materials |
|-----------------|------------|----------------------------|
| Straight flight | 25 | Polypropylene |
| | 50 | Polyethylene Polyacetal |


SIDE GUARDS

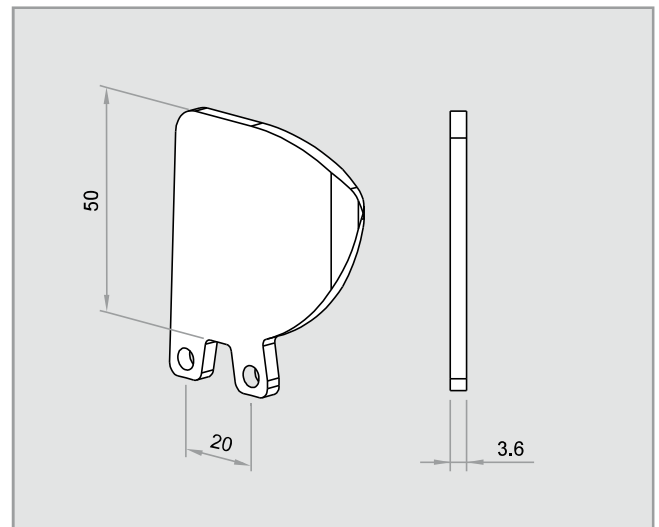


| Accessories | Height (h) | Materials |
|-------------|------------|---|
| Side guards | 50 | Polypropylene Polyethylene Polyacetal |

TECHNICAL DATA [FLIGHTS AND SIDE GUARDS]


BELT ONLY WITH FLIGHTS

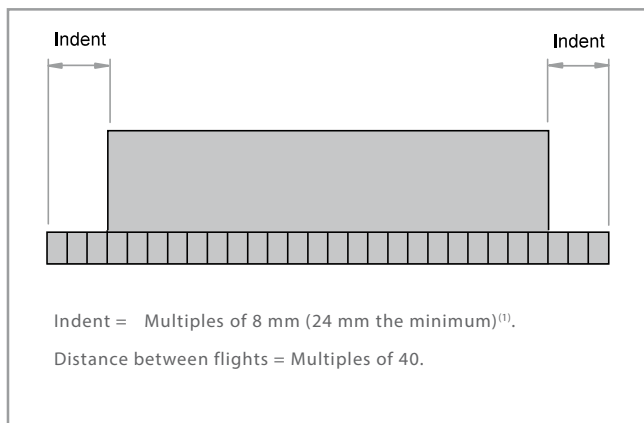


BELT WITH LONGITUDINAL CUTS

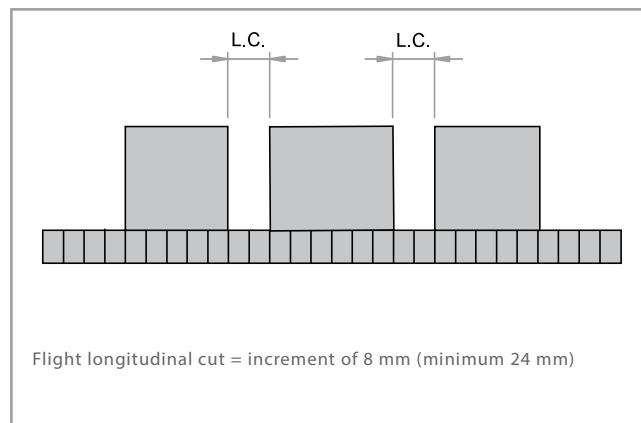


BELT ONLY WITH SIDE GUARDS

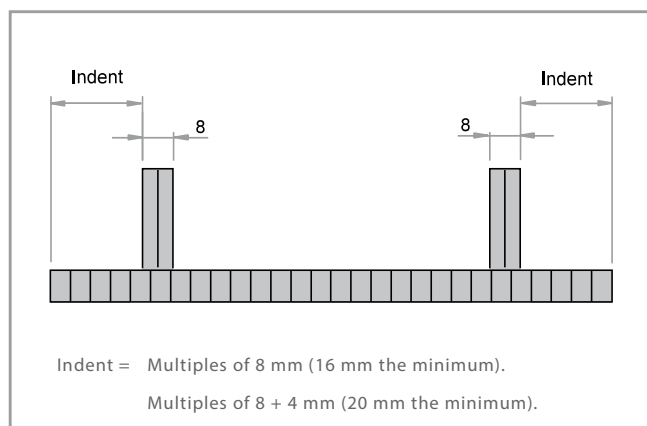


BELT WITH FLIGHTS AND SIDE GUARDS

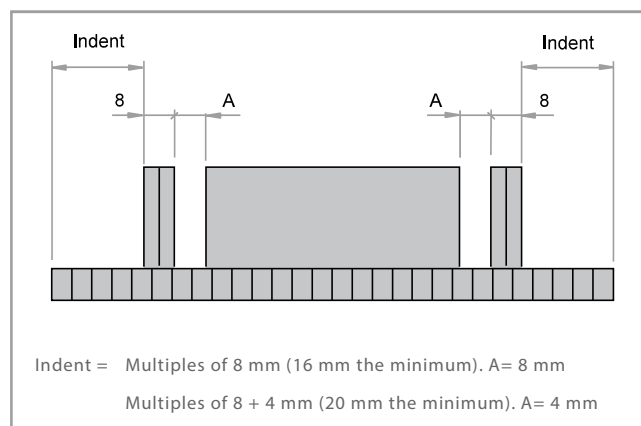

BELT WITH ZIGZAG FLIGHTS

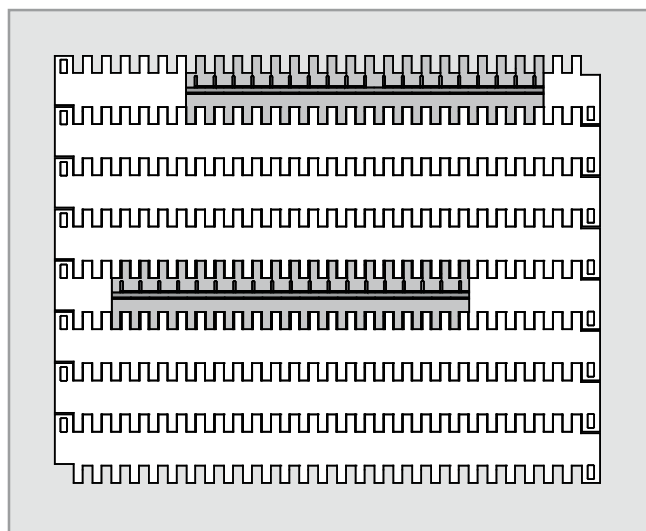


BELT WITH FLIGHTS, WITHOUT INDENT

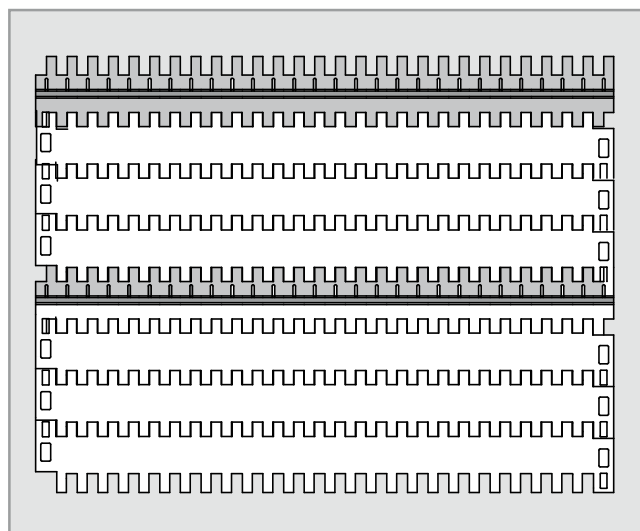


⁽¹⁾ Ask for the possibility of shaping your belt with a smaller indent than that recommended.

CONSTRUCTION DATA [CONVEYOR]

ELEVATING CONVEYOR WITH FLIGHTS

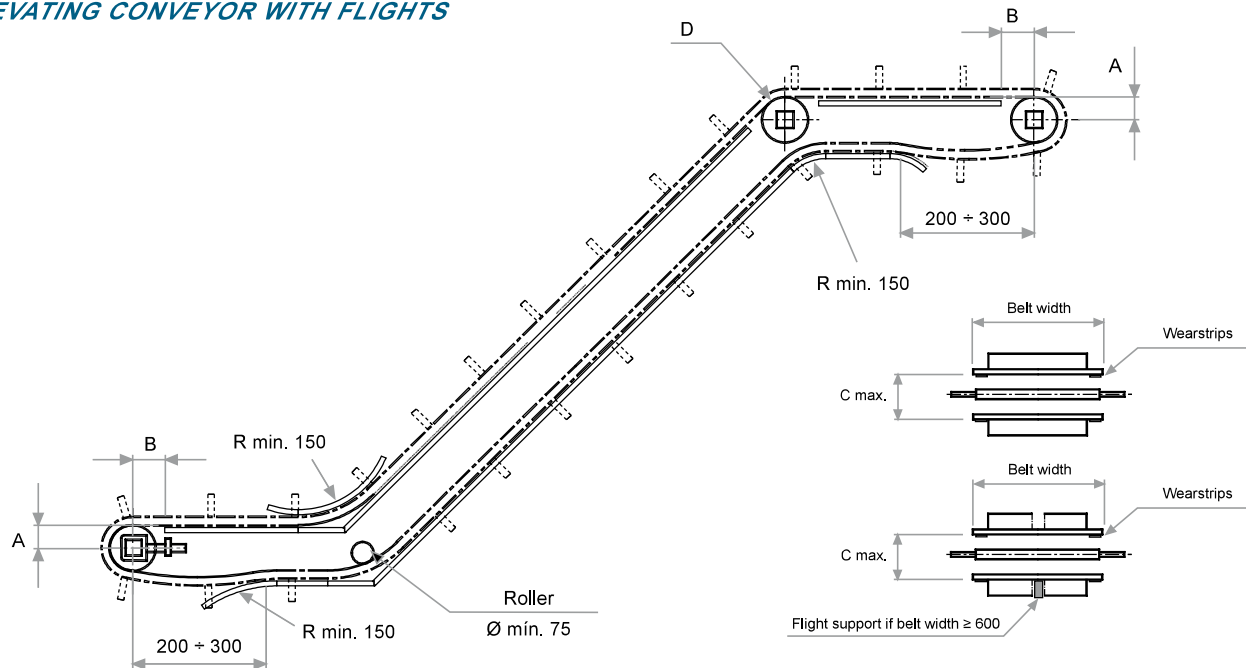

HORIZONTAL CONVEYOR

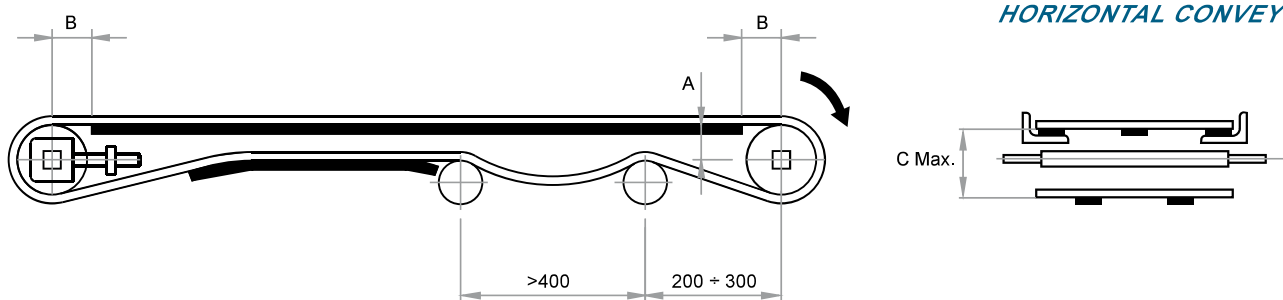

[A] Distance between the sliding surface of the belt and the centre of the shaft.

[B] Distance between the vertical of the shaft and the beginning of the sliding surface.

[C] Distance between the sliding surface of the belt and the support of the return way.

[D] If sprockets are used in the inflexion shaft, do not retain the central one.

[R] This radius must be as big as allowed by the application in order to minimize the wear (min. 150 mm). For belts with side guards, consult about this radius.

In the construction of conveyors, the distances appearing in the chart below must be respected according to the belt Series and the size of the sprockets.

| Nº of teeth T | Ø Pitch | A | B max. | C max. |
|------------------|------------|----|-----------|-----------|
| 8 | 52.2 | 20 | 28 | 65 |
| 16 | 102.5 | 46 | 50 | 110 |
| 24 | 153.5 | 72 | 65 | 155 |

TABLE OF SPROCKETS AND WEARSTRIPS

| Belt nominal width (mm) | | Minimum quantity of sprockets per shaft | Minimum quantity of wearstrips | |
|-------------------------|-------|---|--------------------------------|------------|
| | | | Transport way | Return way |
| 32 | 104 | 1 | 2 | 2 |
| 112 | 216 | 3 | 2 | 2 |
| 224 | 352 | 5 | 3 | 2 |
| 360 | 496 | 7 | 4 | 2 |
| 504 | 632 | 9 | 5 | 3 |
| 640 | 776 | 11 | 6 | 3 |
| 784 | 912 | 13 | 7 | 4 |
| 920 | 1,056 | 15 | 8 | 4 |
| 1,064 | 1,192 | 17 | 8 | 4 |
| 1,200 | 1,336 | 19 | 9 | 5 |
| 1,344 | 1,472 | 21 | 10 | 5 |
| 1,480 | 1,616 | 23 | 11 | 6 |
| 1,624 | 1,752 | 25 | 12 | 6 |
| 1,760 | 1,896 | 27 | 13 | 7 |
| 1,904 | 2,032 | 29 | 14 | 7 |
| 2,040 | 2,176 | 31 | 15 | 8 |
| 2,184 | 2,312 | 33 | 16 | 8 |
| 2,320 | 2,456 | 35 | 17 | 9 |
| 2,464 | 2,592 | 37 | 18 | 9 |


To calculate the necessary minimum quantity of sprockets for the drive shaft as well as for the idle one, the next formula has been used:

$$\text{Minimum quantity} = \frac{\text{Belt width (mm)}}{70 \text{ mm}}$$

This amount must always be odd.

To calculate the quantity of supports, the weight of the product to be transported must be taken into account.


The distance between supports should not exceed 150 mm in the transport way or 300 mm in the return way.

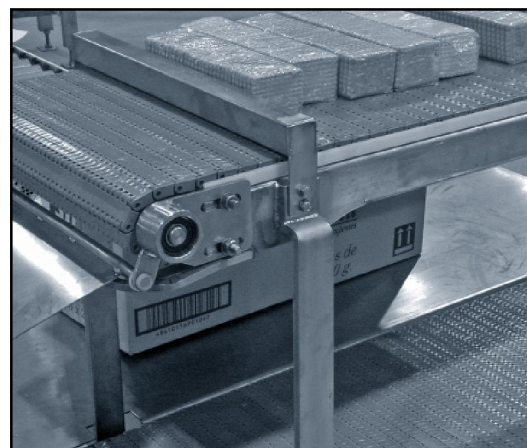

APPLICATIONS



METAL DETECTORS

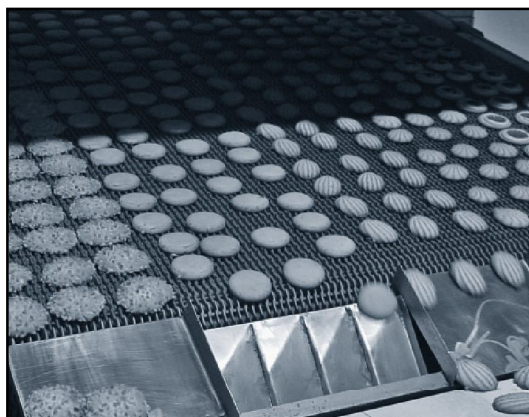


COOLING LINES




ACCUMULATION TABLES



PILE-UP MACHINES

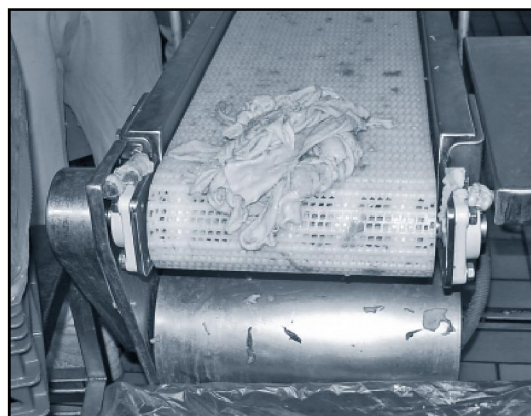

PLASTIC FILM WRAPPING

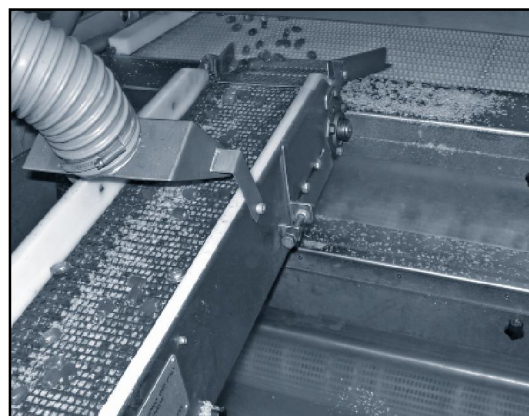

DISTRIBUTORS