

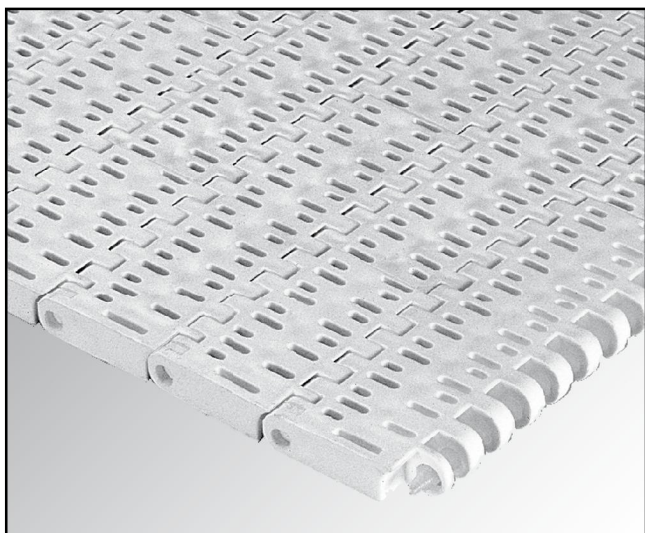


SERIES E30 PERFORATED FLAT TOP

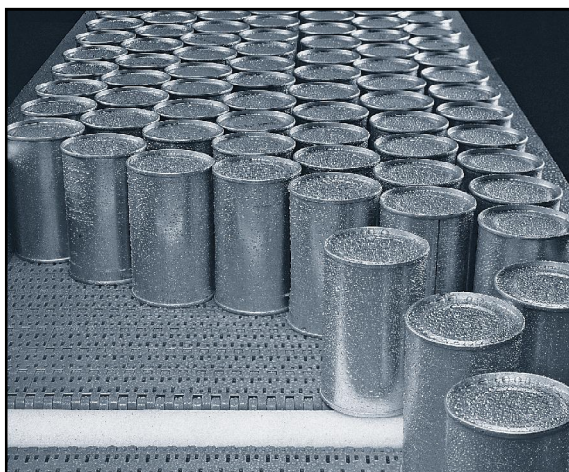

Eurobelt Series E30 Perforated Flat Top has a 17% open area, a completely smooth surface, and grille-shaped small straight holes without structural obstacles. This is the suitable conveyor belt for those applications in which drainage through the belt is desired and the product to be conveyed is small.


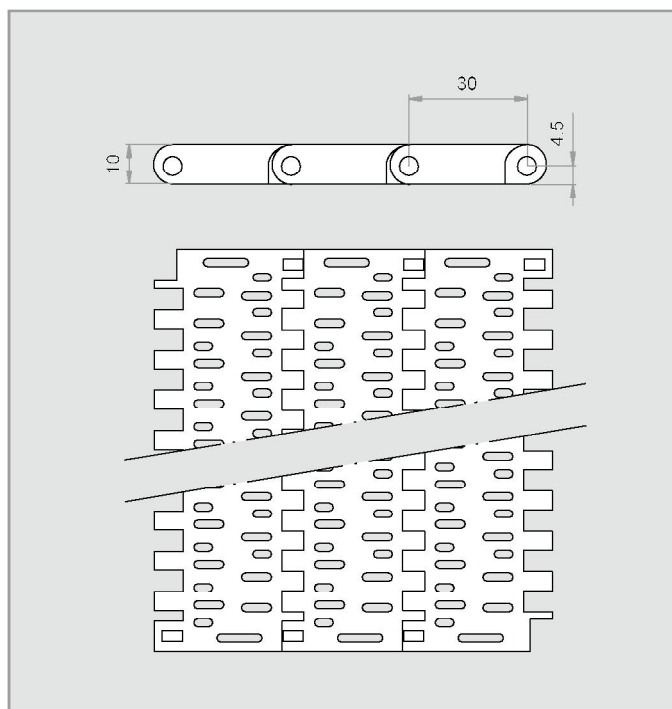


Pitch	30 mm
Surface	Perforated FlatTop
Open area	17 %
Dimensions of openings	[8 x 2] - [5 x 2] mm
Thickness	10 mm
Drive system	Central
Belt width	Multiples of 10 mm
Rod diameter	Ø 4.6 mm
Retention system	Cap

Material of the belt	Material of the rod	Belt strength (kg/m)	Temperature range (°C)	Belt weight (kg/m ²)	Available colours in stock
PP - Polypropylene	PP - Polypropylene	1,000	+1 to +104	5.01	[W] - [G]
PE - Polyethylene	PE - Polyethylene	600	-50 to +65	5.20	[N]
AC - Polyacetal	PP - Polypropylene	2,250	+1 to +90	7.33	[B]
	PE - Polyethylene	1,920	-40 to +65	7.36	[B]




Colours: [W] White - [G] Grey - [B] Blue - [N] Natural - [O] Black. // The materials and colours that are normally in stock are those above indicated. In special cases in which it is needed a belt in a material or colour different from those above mentioned, you should ask directly to EUROBELT.

ACCESSORIES [SPROCKETS]

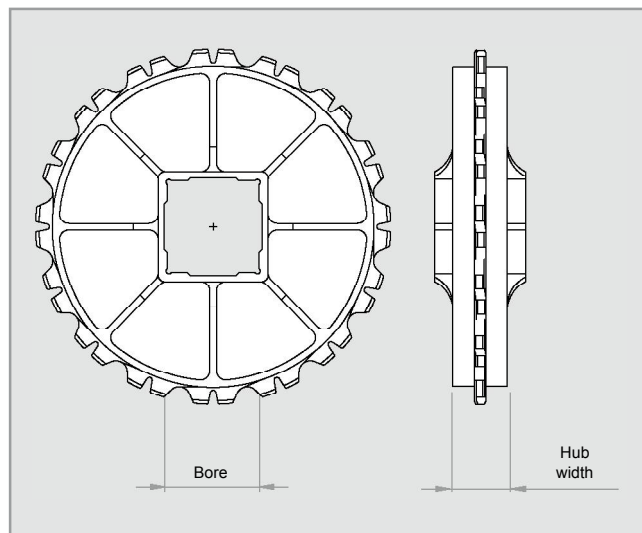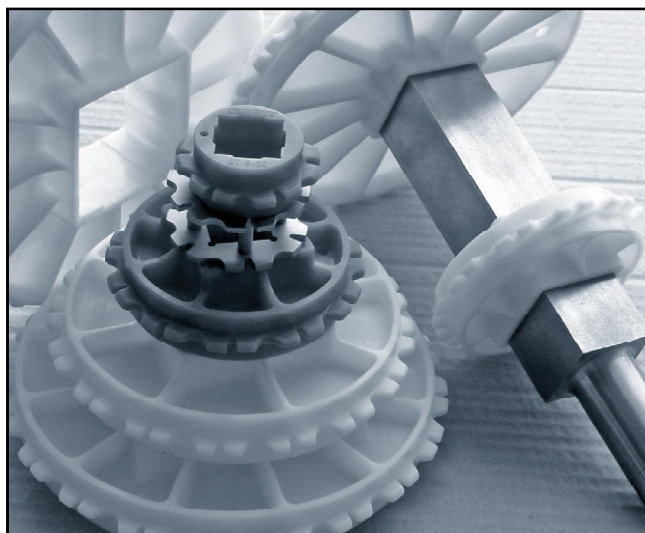

N° of teeth T	Pitch diameter	Bore for square shaft		Hub width	Materials
		mm	inch		
6	60	25	-	24	Polypropylene Polyacetal Stainless steel
9	87.7	25 40	1" 1.5"	24	
11	106.5	40	1.5"	40	
16	153.5	40 60	1.5" 2.5"	40	
20	191.5	40 60 90	1.5"	40	

SPROCKETS FOR SQUARE SHAFT

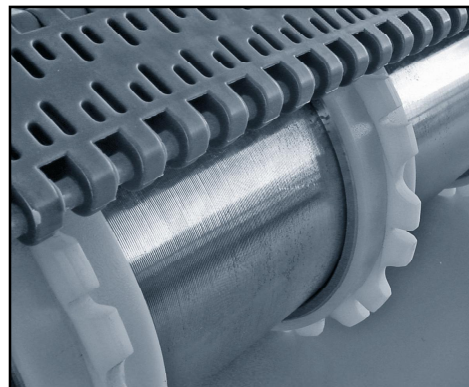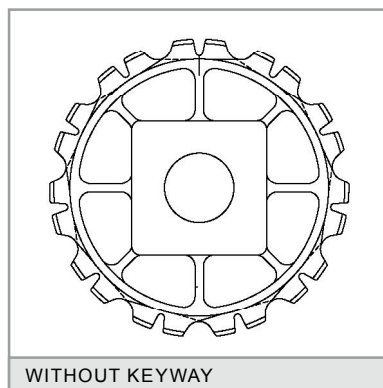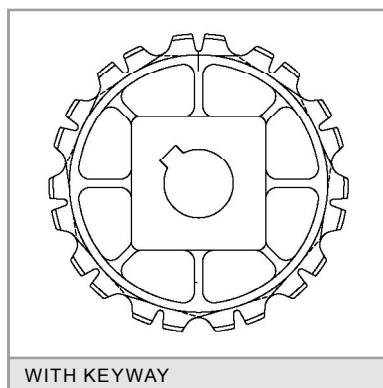

We have plastic sprockets for round shaft with and without keyway. We also have sprockets to be used with motor drum in applications needing a special cleaning or in conveyors in which it is not possible to place the motor in the outside due to problems of space or safety.

ACCESSORIES [RETAINING RINGS]

INSTALLATION


These rings are placed at every side of the central sprocket to fasten it to the shaft in order to avoid any lateral movements of the belt.

They are manufactured in AISI 316 stainless steel and they are fixed by means of a set screw stuffed in the ring itself.


One sprocket, duly fixed with 2 retaining rings, should be put in the centre. Then you should place the same quantity of sprockets at every side of the central one but without any fixing, as they will absorb the possible belt expansions and contractions.

The same procedure should be carried out in both shafts.

Bore for square shaft	Screws
20	M 5 x 5
40	M 6 x 6
60	M 6 x 6
90	M 6 x 6

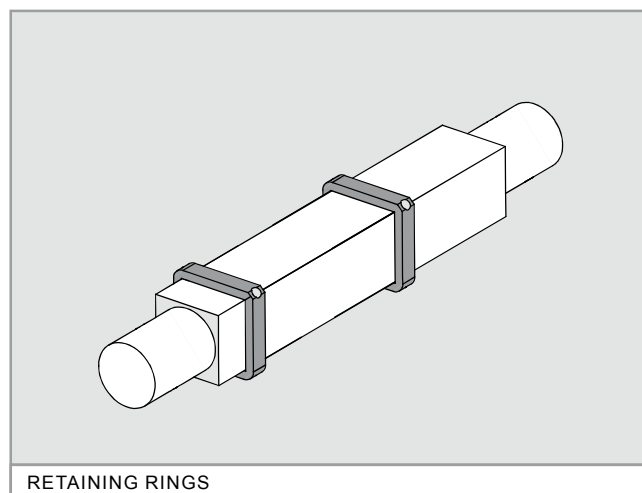

RETAINING RINGS

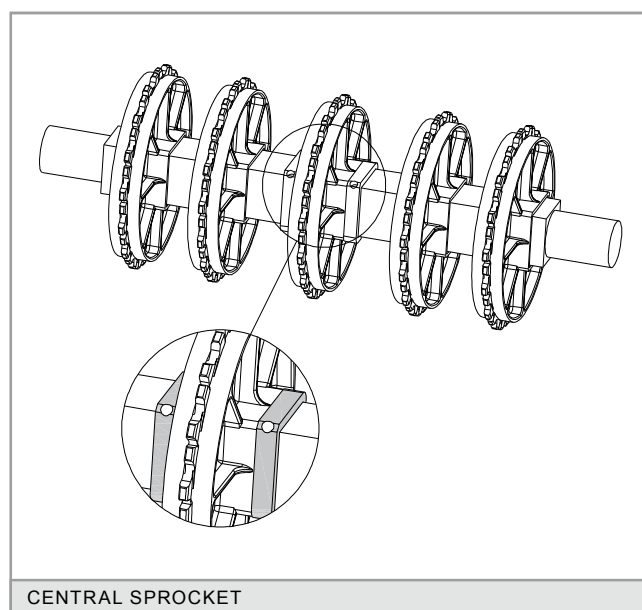

CENTRAL SPROCKET

ACCESSORIES [FLIGHTS AND SIDE GUARDS]





The **flights** are plastic accessories to be inserted across the belt. They are used to push the product in ascent, descent or accompaniment applications, avoiding that it slips along the belt.

Its non-stick side has ribs that project over the surface to prevent the product from sticking.


The **side guards** are plastic accessories to be inserted into the belt structure to retain the product laterally, avoiding overflows and frictions with the conveyor structure itself.

It is possible to cut down the standard height for special applications.

STRAIGHT FLIGHT [STREAMLINE + NO CLING]

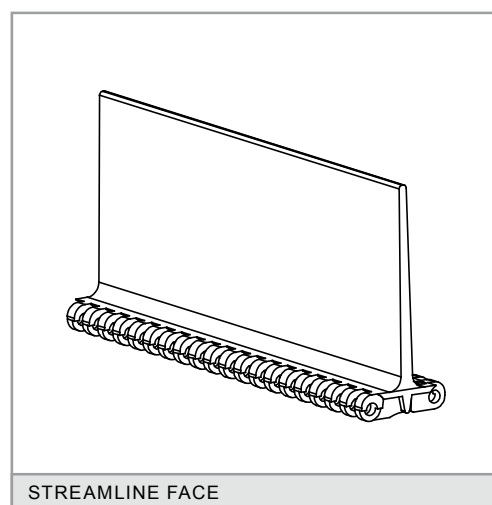
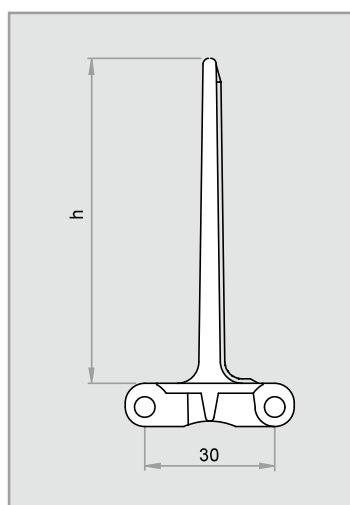


STRAIGHT FLIGHT [NO CLING]

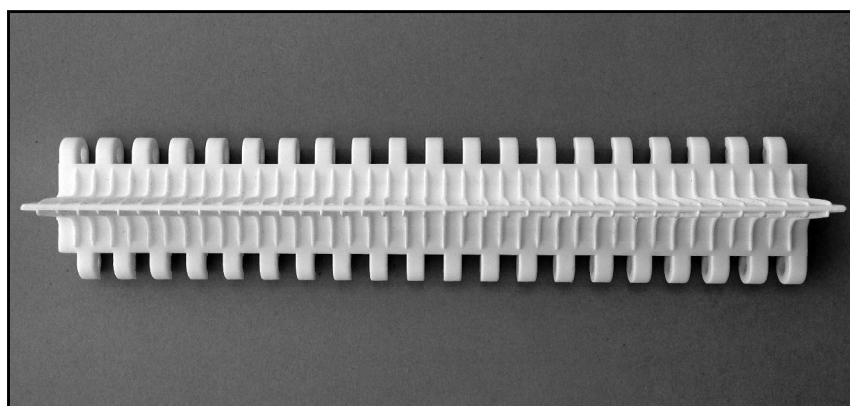



Height (h)	Materials
Straight flight [Streamline + No Cling]	
25	Polypropylene
50	Polyethylene
75	Polyacetal
Straight flight [No Cling]	
25	Polypropylene
50	Polyethylene

BENT FLIGHT

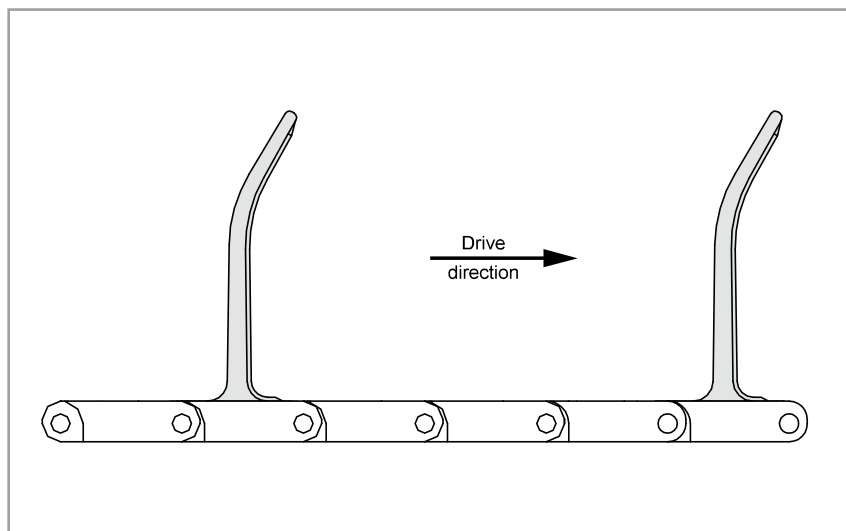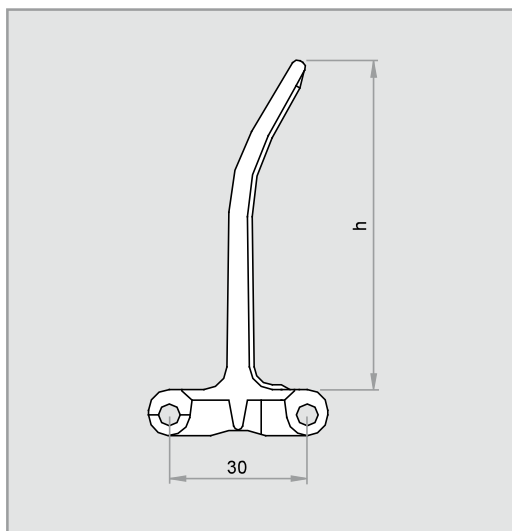

Accessories	Height (h)	Materials
Bent Flight [Streamline + No Cling]	45 70	Polypropylene Polyethylene Polyacetal


SIDE GUARDS

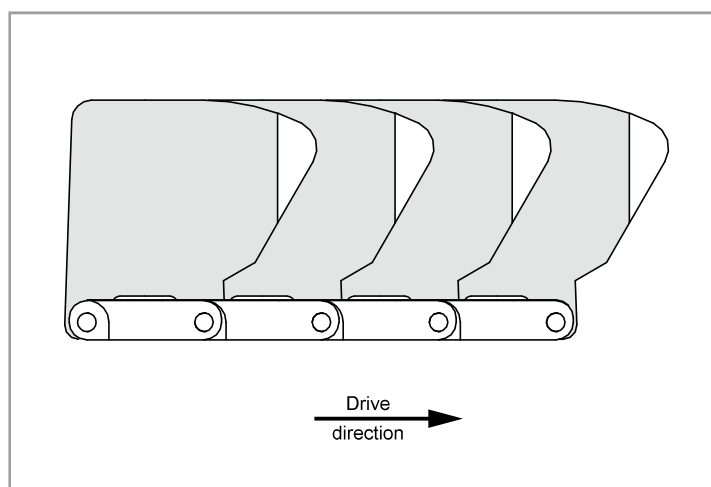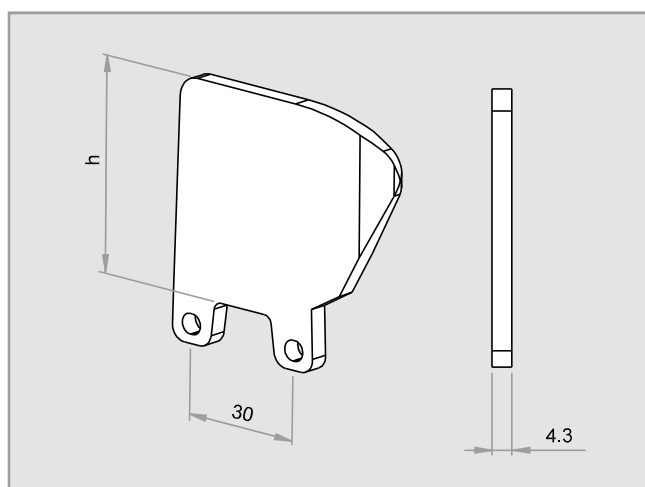


Accessories	Height (h)	Materials
Side guards	50 75	Polypropylene Polyethylene Polyacetal

TECHNICAL DATA [FLIGHTS AND SIDE GUARDS]


BELT ONLY WITH FLIGHTS

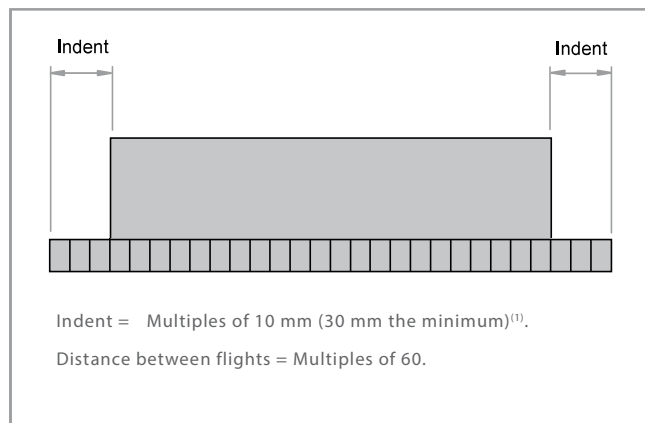


BELT WITH LONGITUDINAL CUTS

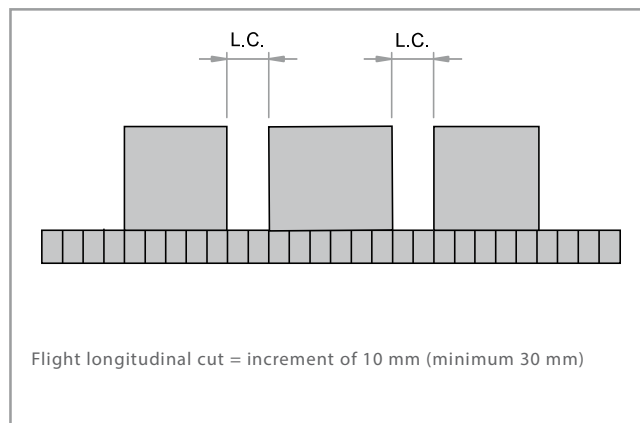


BELT ONLY WITH SIDE GUARDS

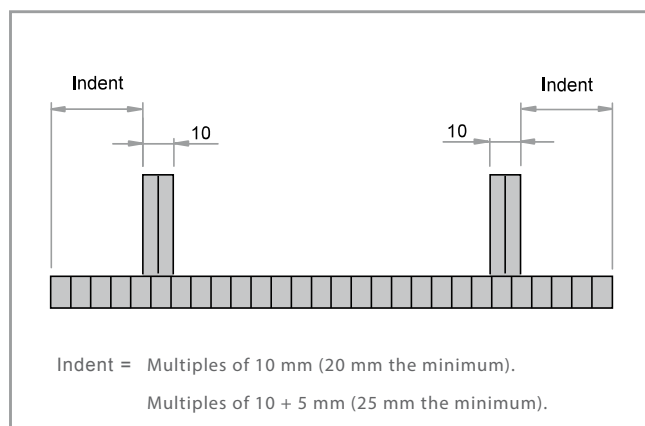


BELT WITH FLIGHTS AND SIDE GUARDS

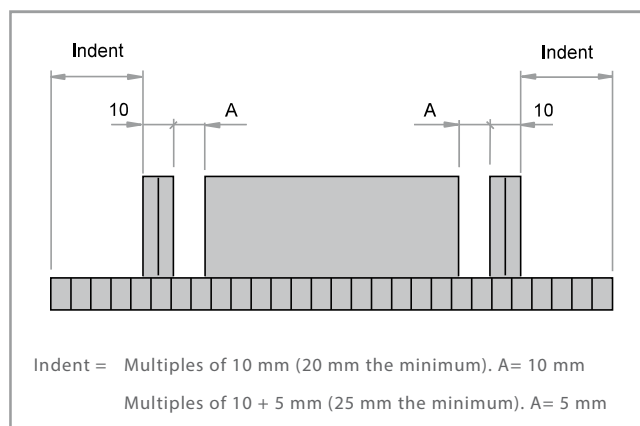

BELT WITH ZIGZAG FLIGHTS

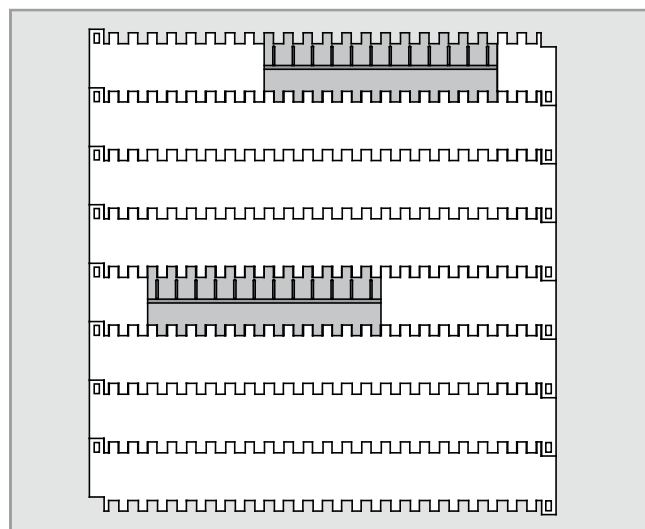


BELT WITH FLIGHTS, WITHOUT INDENT

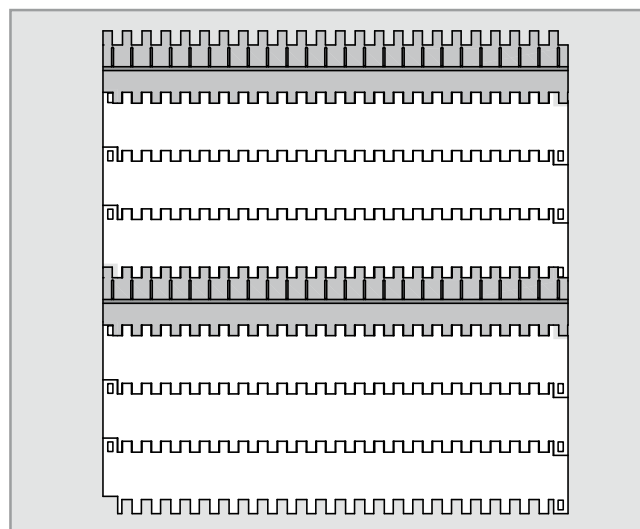


⁽¹⁾ Ask for the possibility of shaping your belt with a smaller indent than that recommended.

CONSTRUCTION DATA [CONVEYOR]

ELEVATING CONVEYOR WITH FLIGHTS

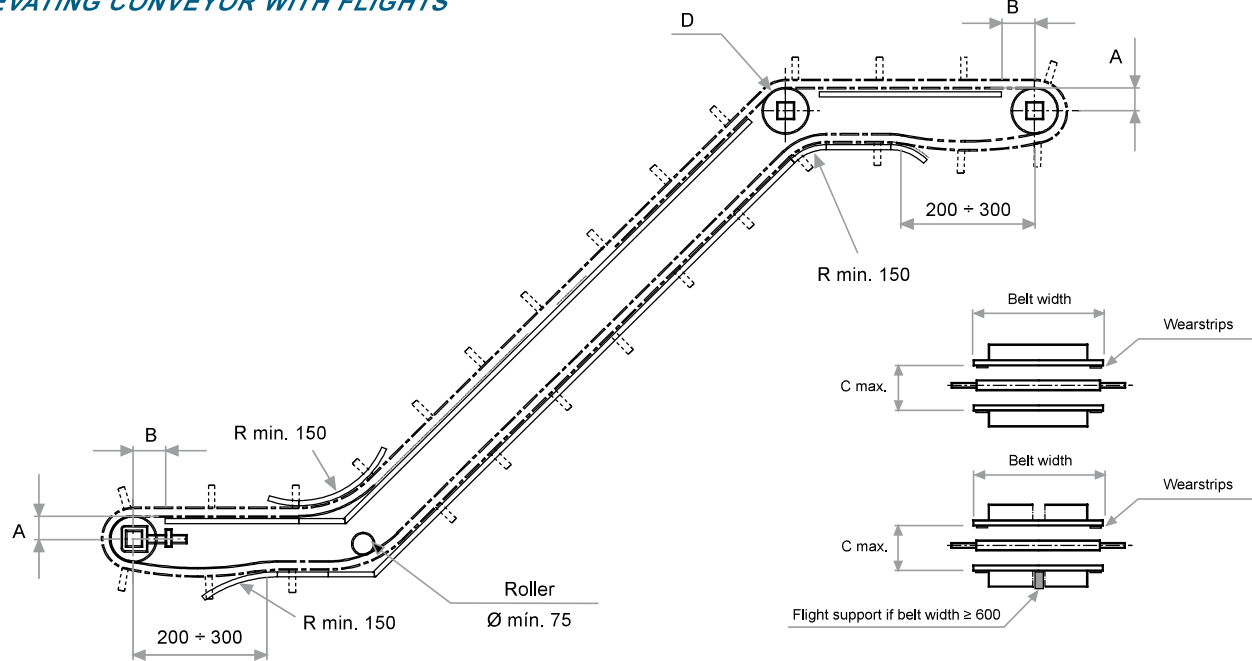

HORIZONTAL CONVEYOR

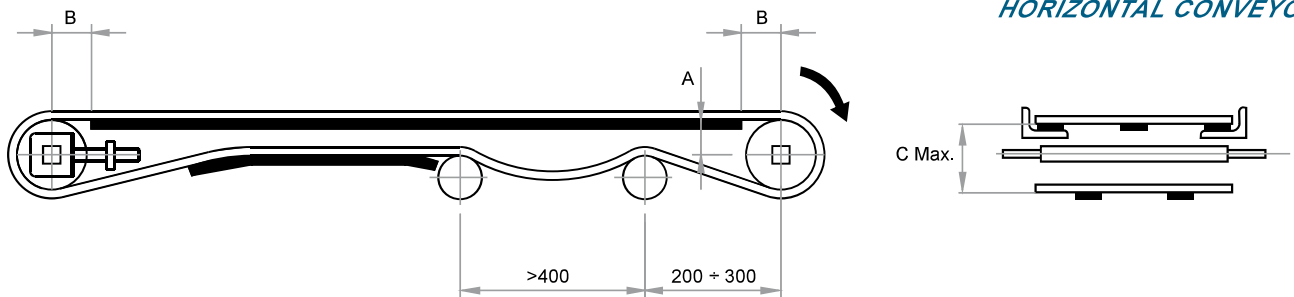

[A] Distance between the sliding surface of the belt and the centre of the shaft.

[B] Distance between the vertical of the shaft and the beginning of the sliding surface.

[C] Distance between the sliding surface of the belt and the support of the return way.

[D] If sprockets are used in the inflexion shaft, do not retain the central one.

[R] This radius must be as big as allowed by the application in order to minimize the wear (min. 150 mm). For belts with side guards, consult about this radius.

In the construction of conveyors, the distances appearing in the chart below must be respected according to the belt Series and the size of the sprockets.

N° of teeth T	Ø Pitch	A	B max.	C max.
6	60	25	30	65
9	87.7	37	40	92
11	106.5	48	50	110
16	153.5	73	65	155
20	191.5	91	75	195

TABLE OF SPROCKETS AND WEARSTRIPS

Belt nominal width (mm)		Minimum quantity of sprockets per shaft	Minimum quantity of wearstrips	
			Transport way	Return way
40	100	1	2	2
110	300	3	2	2
310	500	5	4	3
510	700	7	6	4
710	900	9	8	5
910	1,100	11	10	6
1,110	1,300	13	12	7
1,310	1,500	15	14	8
1,510	1,700	17	16	9
1,710	1,900	19	18	11
1,910	2,100	21	20	12
2,110	2,300	23	22	13
2,310	2,500	25	24	14
2,510	2,700	27	26	15
2,710	2,900	29	28	16
2,910	3,100	31	30	17
3,110	3,300	33	32	18
3,310	3,500	35	34	19
3,510	3,700	37	36	21

To calculate the necessary minimum quantity of sprockets for the drive shaft as well as for the idle one, the next formula has been used:

$$\text{Minimum quantity} = \frac{\text{Belt width (mm)}}{100 \text{ mm}}$$

This amount must always be odd.

To calculate the quantity of supports, the weight of the product to be transported must be taken into account.

The distance between supports should not exceed 150 mm in the transport way or 300 mm in the return way.

